

STINGER EXO35

SPUN BOND MULTI-PLY SYNTHETIC UNDERLAYMENT


Product Specification	Test Method	
Roll Width	48 in.	
Roll Length	250 ft.	
Weight Per Square	2.0 lbs	
Nominal Thickness	7 Mils	ASTM D-1777
Water Transmission	Pass	ASTM D-4869
Breaking Strength	ASTM D-146	
	MD	72 lbs
	CD	40 lbs
Dimensional Stability	ASTM F-1087	
	MD	.04
	CD	.05
Pliability	Pass	ASTM D-226
Unrolling		
	30° F	Pass
	140° F	Pass
Nail Sealability	Pass	ASTM D-7349

ICC-ES ESR-3905

**MEETS OR EXCEEDS
REQUIREMENTS
FOR ASTM D226 & D4869**

STINGER-branded; 48" x 48".


Co-branding available with 34" x 17" logo.

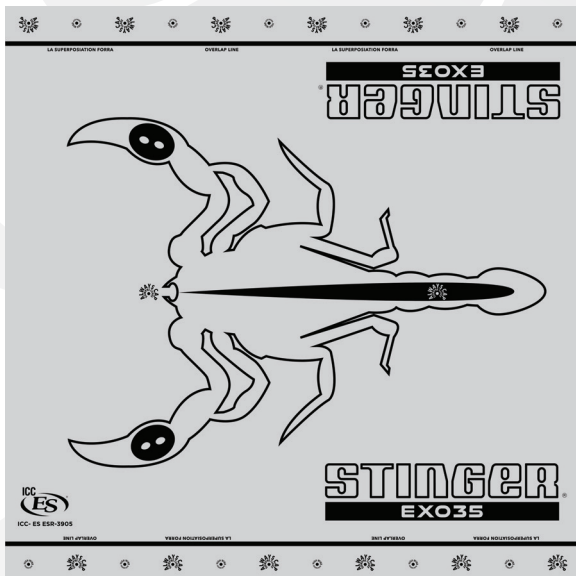

ITEM #0342973




800.746.5659
stingerworld.com



STINGER EXO35

SPUN BOND MULTI-PLY SYNTHETIC UNDERLAYMENT

- 35 year warranty.
- ICC-ES ESR-3905
- Made in the United States.
- Slip resistant spun bond walking surface for added safety; proprietary non-skid additive on underside for better roof deck contact.
- Absorbant top layer reduces water on walking surface.
- 100% polypropylene synthetic woven fabric offers high tear strength.
- Light gray color reduces heat and provides cooler working surface.
- Light - only 20lbs per roll.
- 10 squares per roll - fewer rolls to carry on the roof.
- UV resistant - can be left exposed for up to 6 months.
- Preprinted nailing pattern and overlap lines to speed installation.
- Approved and warrantied for use under metal roof coverings.
- Recommended installation with STINGER® cap tools and cap fasteners, available in collated StaplePac® and NailPac® or HandDrive cap nails.



STINGER CAP SYSTEMS

RECOMMENDED **BEST PRACTICE** FOR SECURING SYNTHETIC UNDERLAYMENTS AND HOUSEWRAP.

35 YEAR WARRANTY



800.746.5659
stingerworld.com